TELESCOPIC TORQUE ARM

Features

- Eliminates torque reaction and removes weight of assembly tool from operator's arm and back.
- Easy to install on the workbench, wall, trolley or production line.
- Can be used with both air or electric torque tools.
- Best if used with a spring balancer (page 23).
- The arm collapses like a telescope providing smooth tool placement.
- Attachment clamp is free to move 360 degrees (see below pictures below).
- Standard tool balancer should be used to hang the tool while using this arm.
- Max torque capacity 50 Nm.
- Max reach is 120 cm; minimum reach is 43 cm.

TA-T050S-100
TA-T050S-120
Telescoping Torque Arm & stand (Fixed Type)

TA-T050C-100
TA-T050C-120
Telescoping Torque Arm (Hanging Type)

TA-T050W-100
TA-T050W-120
Telescoping Torque Arm (Wall-Mounted Type)

TA-T050-100
TA-T050-120
Aluminum alloy
Telescoping Torque Arm with stand & bench clamp

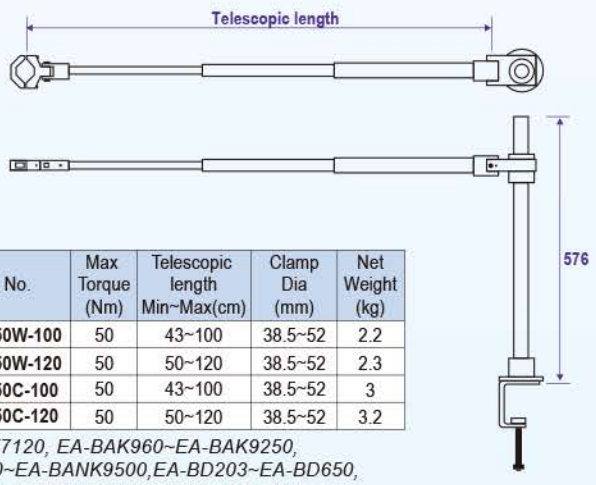

Specifications :

Model No.	Max Torque (Nm)	Telescopic length Min~Max(cm)	Clamp Dia (mm)	Net Weight (kg)
TA-T050-100	50	43~100	38.5~52	4.65
TA-T050-120	50	50~120	38.5~52	4.75
TA-T050S-100	50	43~100	38.5~52	3.5
TA-T050S-120	50	50~120	38.5~52	3.7

Model No.	Max Torque (Nm)	Telescopic length Min~Max(cm)	Clamp Dia (mm)	Net Weight (kg)
TA-T050W-100	50	43~100	38.5~52	2.2
TA-T050W-120	50	50~120	38.5~52	2.3
TA-T050C-100	50	43~100	38.5~52	3
TA-T050C-120	50	50~120	38.5~52	3.2

Appliable Model: EA-BN412~EA-BN650, EA-BK760~EA-BK7120, EA-BAK960~EA-BAK9250, EA-BAN9350~EA-BAN9500, EA-BANK960~EA-BANK9500,EA-BD203~EA-BD650, EA-BTN960~EA-BTN9180, EA-BTNK960~EA-BTNK9180,ED-617~ED-645, ES-618~ES-645