PREMIUM BRUSHLESS DC ELECTRIC SCREWDRIVERS
High Torque Full Auto Shut Off

▪ Torque Range 2~50 N.m

Angle-Lever Start Type
EA-BAKA950L/C6 ~
EA-BAKA9220L/C6

★With 3/8" Sq. Anvil
place "w" at the end of model No.
Example: EA-BAKA950LW/C6

Push to Start Type
EA-BAK9250P/HC6 ~
EA-BAN9350P/C6

Lever Start Type
EA-BAK9250L/HC6 ~
EA-BAN9350L/C6

Push to Start Type
EA-BAN9350PW/C6 w/3/8" Sq. Anvil
EA-BAN9500PW/C6 w/1/2" Sq. Anvil

Lever Start Type
EA-BAN9350LW/C6 w/3/8" Sq. Anvil
EA-BAN9500LW/C6 w/1/2" Sq. Anvil

External Dimension unit:mm

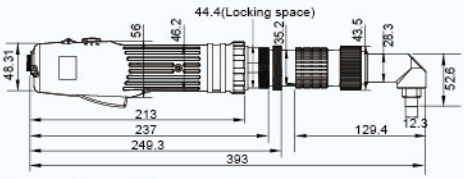

Lever Start Type
EA-BAKA950L/C6 ~ EA-BAKA9220L/C6

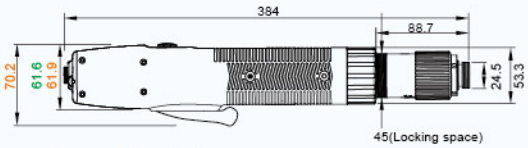

Lever Start Type
EA-BAK9250LH/C6 ~ EA-BAN9500LW/C6

Push to Start Type
EA-BAK9250PH/C6 ~ EA-BAN9500PW/C6

Torque Curve

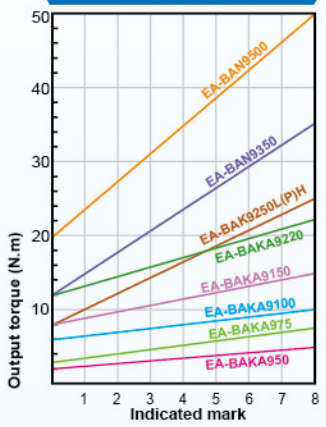

Specifications :

Power Supply	Model No.	Torque Range ±5%			Unloaded Speed ±10% (r.p.m.)		Available Screw				Net Weight		Overall Length		Power Source	Power Consumption	Bit Type
							Machine Screw(ø)		Tapping Screw(ø)								
		kgf-cm	lbf-in	N.m	High	Low	mm	in	mm	in	g	lb	mm	in			
Angle -Lever Start Type																	
■	**EA-BAKA950L/C6**	20.4~51	17.7~44.25	2~5	1200	900	≤5	≤0.20	≤4	≤0.16	2500	5.5	393	15.4	DC40V	100W	B:HEX 6.35mm W:3/8" square
■	**EA-BAKA975L/C6**	30.6~76.5	26.55~66.37	3~7.5	900	680	≤6	≤0.23	≤4.5	≤0.18	2500	5.5	393	15.4	DC40V	120W	
■	**EA-BAKA9100L/C6**	61.2~102	53.1~88.5	6~10	600	450	≤8	≤0.31	≤6	≤0.23	2500	5.5	393	15.4	DC40V	120W	
■	**EA-BAKA9100LH/C6**	61.2~102	53.1~88.5	6~10	880	660	≤8	≤0.31	≤6	≤0.23	2500	5.5	393	15.4	DC40V	150W	
■	**EA-BAKA9150L/C6**	81.6~153	70.8~132.75	8~15	370	280	≤10	≤0.39	≤8	≤0.31	2500	5.5	393	15.4	DC40V	150W	
■	**EA-BAKA9150LH/C6**	81.6~153	70.8~132.75	8~15	600	450	≤10	≤0.39	≤8	≤0.31	2500	5.5	393	15.4	DC40V	150W	
■	**EA-BAKA9220L/C6**	122.4~224.4	106.2~194.7	12~22	370	280	≤10	≤0.39	≤8	≤0.31	2500	5.5	393	15.4	DC40V	150W	
Lever Start Type																	
■	**EA-BAK9250LH/C6**	81.6~255	70.81~221.28	8~25	550	410	≤10	≤0.4	≤8	≤0.32	2200	4.84	380	15.1	DC40V	150W	B:HEX 6.35mm W:3/8" square
■	**EA-BAN9350L/C6**	122.4~357	106.21~309.8	12~35	350	260	≤10	≤0.39	≤8	≤0.31	2200	4.84	380	15.1	DC40V	150W	
■	**EA-BAN9350LW/C6**	122.4~357	106.21~309.8	12~35	350	260	-	-	-	-	2300	5.06	384	15.1	DC40V	150W	W:3/8" square
■	**EA-BAN9500LW/C6**	204~510	177~442.56	20~50	230	170	-	-	-	-	2200	4.84	380	15.1	DC40V	150W	W:1/2" square
Push to Start Type																	
■	**EA-BAK9250PH/C6**	81.6~255	70.81~221.28	8~25	550	410	≤10	≤0.4	≤8	≤0.32	2200	4.84	380	15.1	DC40V	150W	B:HEX 6.35mm W:3/8" square
■	**EA-BAN9350P/C6**	122.4~357	106.21~309.8	12~35	350	260	≤10	≤0.39	≤8	≤0.31	2200	4.84	380	15.1	DC40V	150W	
■	**EA-BAN9350PW/C6**	122.4~357	106.21~309.8	12~35	350	260	-	-	-	-	2300	5.06	384	15.1	DC40V	150W	W:3/8" square
■	**EA-BAN9500PW/C6**	204~510	177~442.56	20~50	230	170	-	-	-	-	2200	4.84	380	15.1	DC40V	150W	W:1/2" square

Screwdrivers come standard with bit type B HEX 6.35mm
CE=W/CE Certificate & ESD Housing. e.g. For Tool W/ESD Model no. is EA-BAKAXXX/CE6, EA-BANXXX/CE6
Note: High torque screwdriver should be ordered with an Auxiliary Torque Arm.(see page.21)
Note: These drivers must be ordered with a power supply on page 11.