AC ELECTRIC SCREWDRIVER DIRECT PLUG IN
Medium Torque Full Auto Shut-off

▫ Torque Range 0.50~4.41 N.m

Feature

- Lever or Push Start.
- Automatic shut-off clutch.
- Torque Accuracy ±3%.
- Reverse/Forward
- Direct Plug-In.
- Excellent for general machine screws.
- RPM Range: 500 ~ 1900
- Easy to operate.

Lever Start Type

110V	220V
ED-617LH1 High Speed	ED-617LH2 High Speed
ED-622L1	ED-622L2
ED-630L1	ED-630L2
ED-630LH1 High Speed	ED-630LH2 High Speed
ED-645L1	ED-645L2

Push to Start Type

110V	220V
ED-617PH1 High Speed	ED-617PH2 High Speed
ED-622P1	ED-622P2
ED-630P1	ED-630P2
ED-630PH1 High Speed	ED-630PH2 High Speed
ED-645P1	ED-645P2

External Dimension unit:mm

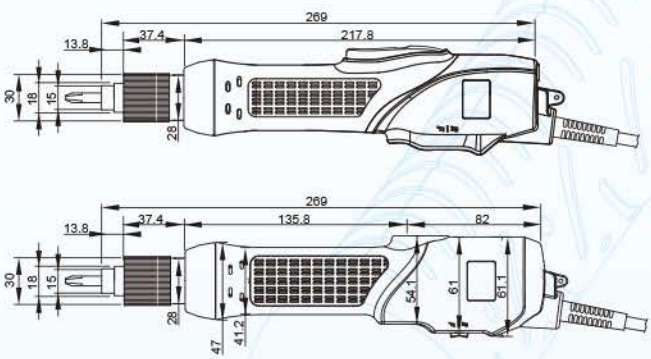

Lever Start Type
ED-617LH1 ~ ED-645L2

Push to Start Type
ED-617PH1 ~ ED-645P2

Torque Curve

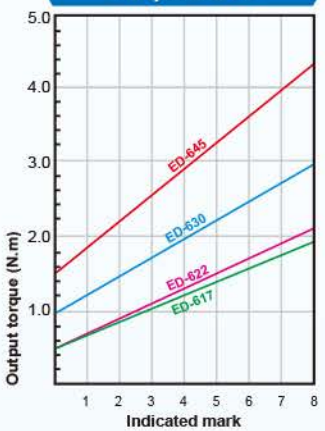

Specifications :

Model No.	Torque Range ±3%			Uploaded Speed ±10% (r.p.m.)	Available Screw				Net Weight		Overall Length		Power Source	Bit Type
					Machine Screw (φ)		Tapping Screw (φ)							
	kgf-cm	lbf-in	N.m		mm	in	mm	in	g	lb	mm	in		
Lever Start Type														
ED-617LH1	5~17	4.34~14.76	0.50~1.67	1900	2.3~4.0	0.09~0.16	2.3~3.5	0.09~0.14	700	1.54	269	10.6	AC110~120V 50/60Hz	A HEX 5mm / B HEX 6.35mm
ED-622L1	5~22	4.34~19.10	0.49~2.16	1000	2.6~4.0	0.10~0.16	2.6~3.5	0.10~0.14	700	1.54	269	10.6		
ED-630L1	10~30	8.68~26.04	0.98~2.94	700	3.0~5.0	0.12~0.20	3.0~4.0	0.12~0.16	700	1.54	269	10.6		
ED-630LH1	10~30	8.68~26.04	0.98~2.94	1000	3.0~5.0	0.12~0.20	3.0~4.0	0.12~0.16	700	1.54	269	10.6		
ED-645L1	15~45	13.02~39.06	1.47~4.41	500	4.0~6.0	0.16~0.24	4.0~5.0	0.12~0.20	700	1.54	269	10.6		
ED-617LH2	5~17	4.34~14.76	0.50~1.67	1900	2.3~4.0	0.09~0.16	2.3~3.5	0.09~0.14	700	1.54	269	10.6	AC220~240V 50/60Hz	
ED-622L2	5~22	4.34~19.10	0.49~2.16	1000	2.6~4.0	0.10~0.16	2.6~3.5	0.10~0.14	700	1.54	269	10.6		
ED-630L2	10~30	8.68~26.04	0.98~2.94	700	3.0~5.0	0.12~0.20	3.0~4.0	0.12~0.16	700	1.54	269	10.6		
ED-630LH2	10~30	8.68~26.04	0.98~2.94	1000	3.0~5.0	0.12~0.20	3.0~4.0	0.12~0.16	700	1.54	269	10.6		
ED-645L2	15~45	13.02~39.06	1.47~4.41	500	4.0~6.0	0.16~0.24	4.0~5.0	0.12~0.20	700	1.54	269	10.6		
Push to Start Type														
ED-617PH1	5~17	4.34~14.76	0.50~1.67	1900	2.3~4.0	0.09~0.16	2.3~3.5	0.09~0.14	700	1.54	269	10.6	AC110~120V 50/60Hz	
ED-622P1	5~22	4.34~19.10	0.49~2.16	1000	2.6~4.0	0.10~0.16	2.6~3.5	0.10~0.14	700	1.54	269	10.6		
ED-630P1	10~30	8.68~26.04	0.98~2.94	700	3.0~5.0	0.12~0.20	3.0~4.0	0.12~0.16	700	1.54	269	10.6		
ED-630PH1	10~30	8.68~26.04	0.98~2.94	1000	3.0~5.0	0.12~0.20	3.0~4.0	0.12~0.16	700	1.54	269	10.6		
ED-645P1	15~45	13.02~39.06	1.47~4.41	500	4.0~6.0	0.16~0.24	4.0~5.0	0.12~0.20	700	1.54	269	10.6		
ED-617PH2	5~17	4.34~14.76	0.50~1.67	1900	2.3~4.0	0.09~0.16	2.3~3.5	0.09~0.14	700	1.54	269	10.6	AC220~240V 50/60Hz	
ED-622P2	5~22	4.34~19.10	0.49~2.16	1000	2.6~4.0	0.10~0.16	2.6~3.5	0.10~0.14	700	1.54	269	10.6		
ED-630P2	10~30	8.68~26.04	0.98~2.94	700	3.0~5.0	0.12~0.20	3.0~4.0	0.12~0.16	700	1.54	269	10.6		
ED-630PH2	10~30	8.68~26.04	0.98~2.94	1000	3.0~5.0	0.12~0.20	3.0~4.0	0.12~0.16	700	1.54	269	10.6		
ED-645P2	15~45	13.02~39.06	1.47~4.41	500	4.0~6.0	0.16~0.24	4.0~5.0	0.12~0.20	700	1.54	269	10.6		

Screwdrivers come standard with bit type B HEX 6.35mm

Meet RoHS standard, Optional CE certificate is available. (220V)