PREMIUM BRUSHLESS DC PISTOL SCREWDRIVERS
Medium Torque With Full Auto Shut Off Clutches

▫ Torque Range 0.3~7 N.m

6 PIN

Top Cable Connection
EA-BTK620LU/C6 - EA-BTK670LU/C6

Bottom Cable Connection
EA-BTK620LD/C6 - EA-BTK670LD/C6

EPAA50006-B6P-6N
(For BTK620~BTK670)

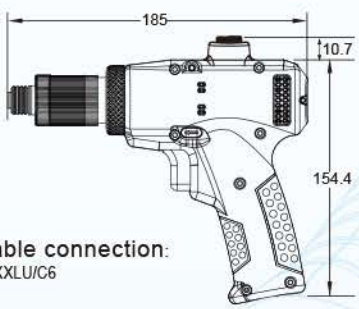

Top cable connection:
EA-BTK6XXLU/C6

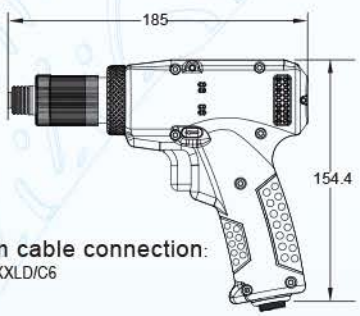

Bottom cable connection:
EA-BTK6XXLD/C6

Torque Curve

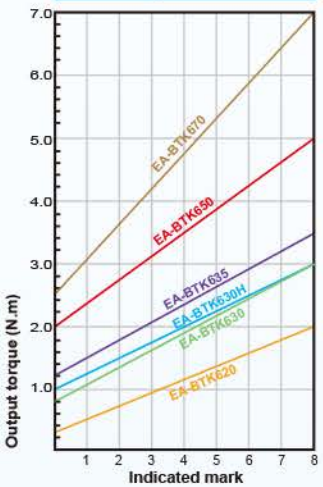

Specifications :

Power Supply	Model No.	Torque Range±3%			Unloaded Speed ±10% (r.p.m.)		Available Screw				Net Weight		Overall Length		Power Source	Power Consumption	Bit Type
							Machine Screw(ø)		Tapping Screw(ø)								
		kgf-cm	lbf-in	N.m	Hi	Lo	mm	in	mm	in	g	lb	mm	in			
Top Cable Connection																	
■	**EA-BTK620LU/C6**	3.06~20.4	2.6~17.7	0.3~2.0	1200	900	2.3~3.5	0.09~0.13	2.3~3.0	0.09~0.12	700	1.54	185	7.28	DC40V	50W	A HEX 5mm B HEX 6.35mm
■	**EA-BTK630LU/C6**	8.16~30.6	7.1~26.5	0.8~3.0	1200	900	2.6~4.0	0.10~0.15	2.6~3.5	0.10~0.13	700	1.54	185	7.28	DC40V	50W	
NEW ■	**EA-BTK630LHU/C6**	10.2~30.6	8.9~26.5	1~3.0	3300	2480	2.0~4.0	0.08~0.15	2.0~3.5	0.08~0.13	700	1.54	185	7.28	DC40V	50W	
NEW ■	**EA-BTK635LHU/C6**	12.24~35.7	10.68~32.04	1.2~3.5	1700	1280	2.6~4.0	0.10~0.15	2.6~3.5	0.10~0.13	700	1.54	185	7.28	DC40V	50W	
■	**EA-BTK650LU/C6**	20.4~51	17.7~44.2	2~5	700	530	4.0~5.0	0.15~0.19	≤4	≤0.16	700	1.54	185	7.28	DC40V	50W	
NEW ■	**EA-BTK650LHU/C6**	20.4~51	17.7~44.2	2~5	1000	750	4.0~5.0	0.15~0.19	≤4	≤0.16	700	1.54	185	7.28	DC40V	50W	
NEW ■	**EA-BTK670LU/C6**	25.5~71.3	22.1~61.9	2.5~7	850	640	5.0~6.0	0.19~0.23	≤5	≤0.20	700	1.54	185	7.28	DC40V	50W	
Bottom Cable Connection																	
■	**EA-BTK620LD/C6**	3.06~20.4	2.6~17.7	0.3~2.0	1200	900	2.3~3.5	0.09~0.13	2.3~3.0	0.09~0.12	700	1.54	185	7.28	DC40V	50W	A HEX 5mm B HEX 6.35mm
■	**EA-BTK630LD/C6**	8.16~30.6	7.1~26.5	0.8~3.0	1200	900	2.6~4.0	0.10~0.15	2.6~3.5	0.10~0.13	700	1.54	185	7.28	DC40V	50W	
NEW ■	**EA-BTK630LHD/C6**	10.2~30.6	8.9~26.5	1~3.0	3300	2480	2.0~4.0	0.08~0.15	2.0~3.5	0.08~0.13	700	1.54	185	7.28	DC40V	50W	
NEW ■	**EA-BTK635LHD/C6**	12.24~35.7	10.68~32.04	1.2~3.5	1700	1280	2.6~4.0	0.10~0.15	2.6~3.5	0.10~0.13	700	1.54	185	7.28	DC40V	50W	
■	**EA-BTK650LD/C6**	20.4~51	17.7~44.2	2~5	700	530	4.0~5.0	0.15~0.19	≤4	≤0.16	700	1.54	185	7.28	DC40V	50W	
NEW ■	**EA-BTK650LHD/C6**	20.4~51	17.7~44.2	2~5	1000	750	4.0~5.0	0.15~0.19	≤4	≤0.16	700	1.54	185	7.28	DC40V	50W	
NEW ■	**EA-BTK670LD/C6**	25.5~71.3	22.1~61.9	2.5~7	850	640	5.0~6.0	0.19~0.23	≤5	≤0.20	700	1.54	185	7.28	DC40V	50W	

Screwdrivers come standard with bit type B HEX 6.35mm
CE=W/CE Certificate & ESD Housing. Example: For Tool W/ESD Model no. is EA-BNXXX/CE6, EA-BTKXXX/CE6
Note 1: Must be ordered with a power supply from page 11. Note 2: Color chart is used to match up screwdrivers with power supplies.