Supporting Arm & Torque Reaction Arm / Fasten Stroke Cylinder Equipment

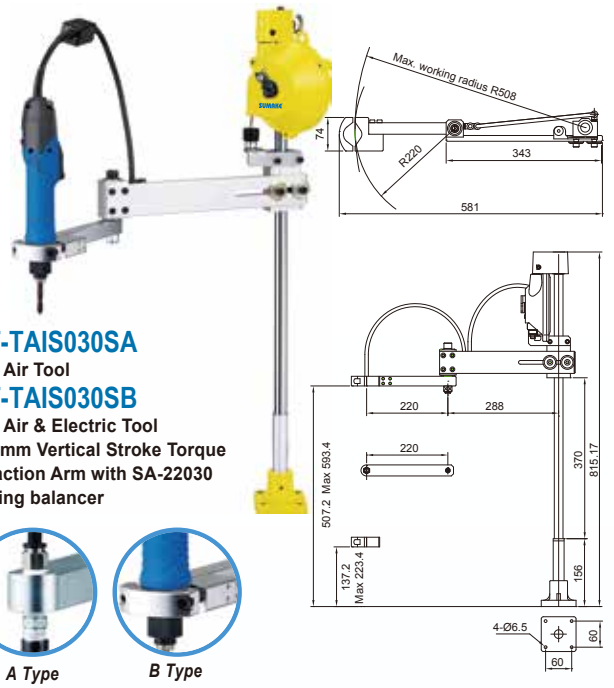

ST-TAIS030SA
For Air Tool
ST-TAIS030SB
For Air & Electric Tool
370mm Vertical Stroke Torque Reaction Arm with SA-22030 spring balancer

A Type *B Type*

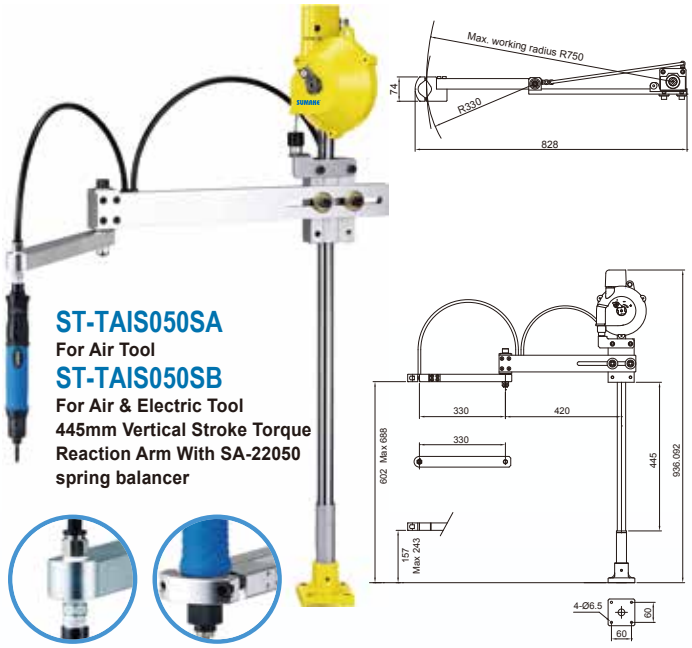

ST-TAIS050SA
For Air Tool
ST-TAIS050SB
For Air & Electric Tool
445mm Vertical Stroke Torque Reaction Arm With SA-22050 spring balancer

A Type *B Type*

TA-22050A
Clamp: 20mm (Standard)
TA-22050B
Clamp: 21~40mm (Customized)
Torque Supporting Arm
Horizontal Stoke: 300mm
Vertical Stroke: 218mm
Max Torque: 10Nm

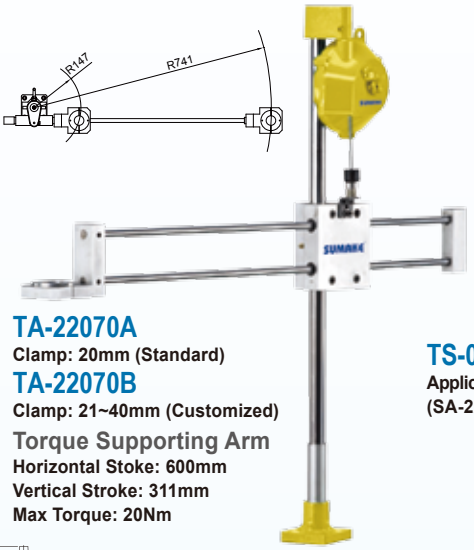

TA-22070A
Clamp: 20mm (Standard)
TA-22070B
Clamp: 21~40mm (Customized)
Torque Supporting Arm
Horizontal Stoke: 600mm
Vertical Stroke: 311mm
Max Torque: 20Nm

TS-01(Balancer Excluded)
Applicable Spring Balancer (SA-2201~SA-22015)

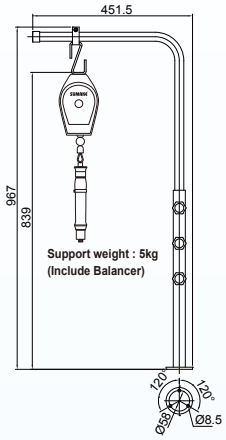



(Unit : mm)

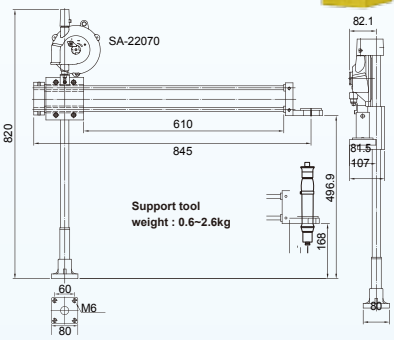

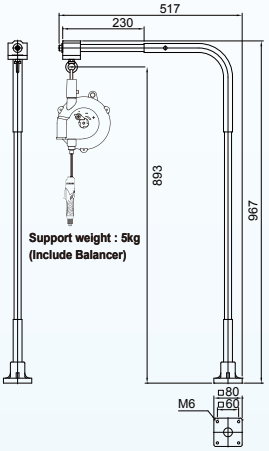

TS-02(Balancer Excluded)
Applicable Spring Balancer (SA-2201~SA-22015)

Specification:

Model No.	Max Torque		Max Working Area (mm)	Vertical Stroke (mm)	Tool Weight (kgs)	Clamp Capacity (mm)
	kgf-cm	Nm				
ST-TAIS030SA	150	15.3	R508	370	< 1	-
ST-TAIS030SB	150	15.3	R508	370	< 0.8	37~52
ST-TAIS050SA	250	25.5	R750	445	< 1.65	-
ST-TAIS050SB	250	25.5	R750	445	< 1.45	37~52
TA-22050A	100	10	300	218	0.7-2.7	20

Model No.	Max Torque		Max Working Area (mm)	Vertical Stroke (mm)	Tool Weight (kgs)	Clamp Capacity (mm)
	kgf-cm	Nm				
TA-22050B	100	10	300	218	0.7-2.7	21-40
TA-22070A	150	15	600	311	0.6-2.6	20
TA-22070B	150	15	600	311	0.6-2.6	21-40
TS-01	-	-	-	-	5	-
TS-02	-	-	-	-	5	-